

VK

REFRIGERATED DISPLAY CABINETS



The BRATŘI HORÁKOVÉ s.r.o. Company, a traditional Czech producer of cooling technology is increasing its production range of display cabinets for butchers and sausage-makers with the **VK** model designed for installation on supporting consoles on the wall or on the another supporting constructions above the floor.

VK - Refrigerated Display Cabinets with static evaporator and remote condensing unit are designed for the sale of meat products and meat on hooks. The

external frame of doors, interior cabinet, shelves and hooks are made of corrosion-proof steel. The large glazed surface of the sliding isolation doors permits energy-saving, hygienic and attractive presentation of goods. The cabinets are equipped with electronic regulator, temperature gauge and automatic defrosting.

HYGIENE & AESTHETICS – The interior of the box and outer door frame is made of stainless steel, there are fluorescent lamps and a digital indicator of space temperature.

VARIABILITY & SPATIAL LAYOUT – It is possible to install a stainless-steel suspended or rack system on the customer's request. Sliding doors allow you to use the areas of existing as well as newly built interiors in the optimum way.

ENERGY SAVINGS – The insulating shell of the cabinets consist of a CFC free polyurethane sandwich, 50 mm thick ($k=0,5 \text{ W/m}^2\text{K}$), double insulating glazing is also used. The cooling system **with static evaporator** is designed for ensuring a uniform circulation of cooling air. The operation is fully automatic, incl. defrosting. The cooling complies with environmental and safety requirements of European standards.




| Technical parameters | VK 1500 | VK 2100 |
|---|------------------|------------------|
| External dimensions ^{*)} /width x depth x height/ | 1500x400x1280 mm | 2100x400x1280 mm |
| Internal dimensions /width x depth x height/ | 1400x280x1080 mm | 2000x280x1080 mm |
| Volume | 400 l | 600 l |
| Insulation thickness / CFC free PU / 40kg/m ³ | 50 mm | 50 mm |
| Lighting | 36 W | 58 W |
| El. input of defrosting ^{**)} | 700 W | 1000 W |
| El. input of unit /230V-1-50Hz/ (-10/+45°C) | 512 W / 3,2 A | 512 W / 3,2 A |
| Refrigerant ^{***)} | R404A | R404A |

^{*)} Mentioned dimensions vary according to used top mask (+100 mm).

Standard remote condensing unit is possible to be placed up to 12 m distance in the same level as a cabinet.

^{**)} defrost condensate should be drained away to sink hole or container /not part of the delivery/.

^{***)} Optional R134a

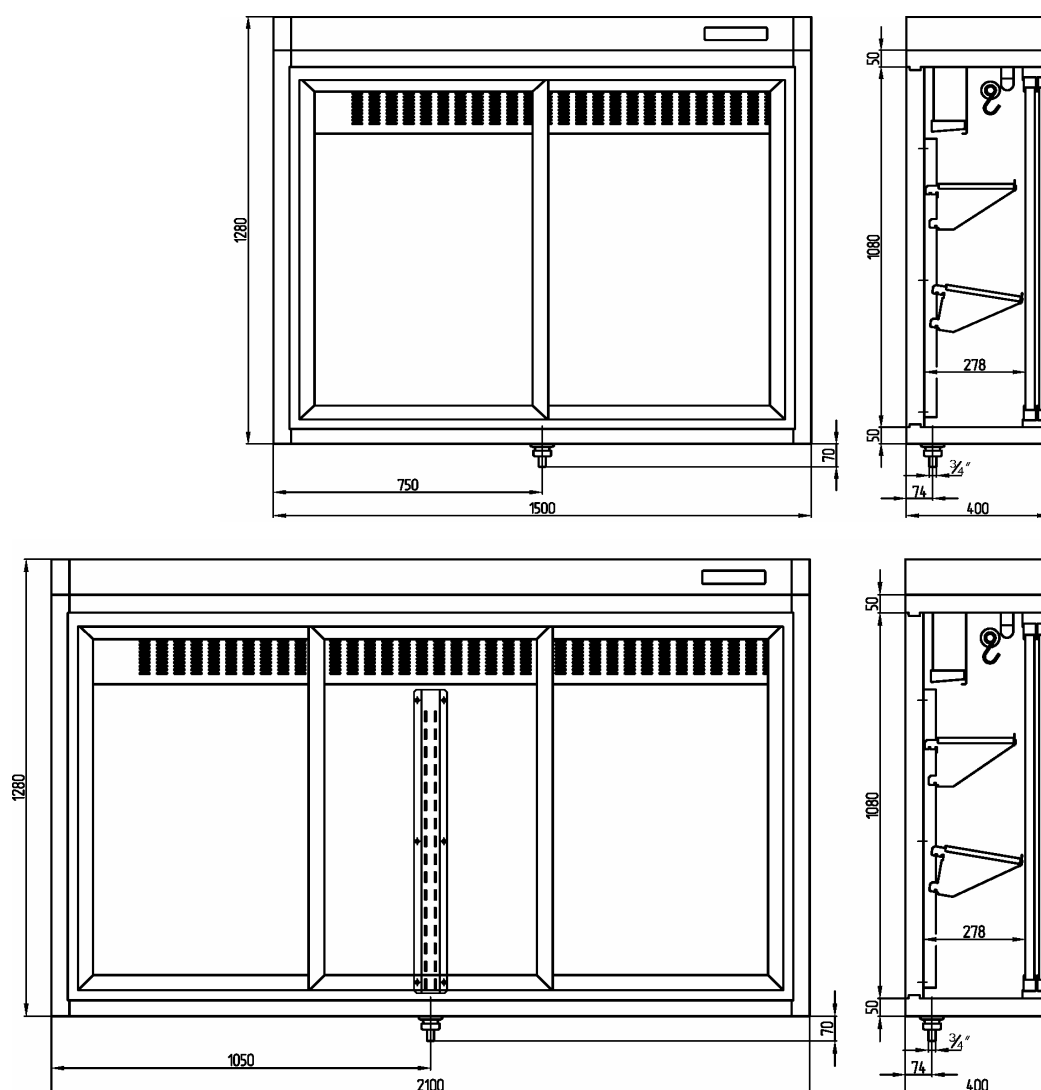

Company address:

☒ Mělnická 150, 277 06 Lužec nad Vltavou

☎ +420 315 619 111

☎ +420 315 619 999

✉ horak@horak-bros.com

<http://www.horak-bros.com>

Export department:

☎ +420 315 619 104

☎ +420 315 619 110

☎ +420 315 619 999

✉ export@horak-bros.com

Manufacturer reserves the right to modify technical features without notice.