

ZC / ZM

ROLL-IN BLASTCHILLER / FREEZER SCHOCKKÜHLER / FROSTER



Technical features

Electronic control device for:

- Soft or Hard blast chilling
 - Blast freezing
 - Cold storage mode
 - Automatic/manual defrost
- Insert temperature probe
Ambient temperature up to 32°C
Cooling air /internal temperature/ up to -40°C
Stainless steel or white lacquered design

Optional

- Built in printer
- Sterilizer

Technische Eigenschaften

- elektronischer Regler für:
 - Schockkühlung wahlbar („soft“ oder „hard“)
 - Schockfrieren
 - Aufbewahrung von gekühlte/gefrorene Waren
- Automatische /manuelle Abtaug
Kernfühler
Umgebungstemperatur bis zu 32°C
Kühlluft bis zu -40°C
Edelstahl oder lackbeschichtete Ausführung


Sonderzubehör

- Registriergerät (Zeit und Temperaturen)
- Sterilisierungsgerät


Model		70.05 A	70.05	140.05A	140.05	210
Capacity – Leistung xx/ ZC (+70 > +3°C) / 90 min [kg] ZM (+70 > -18°C) / 240 min [kg]		70	70	140	140	210
Width - Breite [mm]	ZC	1000	1650	1150	2150	2150
	ZM				2250	2250
ZC - Depth - Tiefe [mm]	ZC	1150(+110)	1000(+110)	1650(+110)	1650(+110)	2150(+110)
	ZM				1750	2250
Height - Höhe [mm]	ZC	2045/2100	2045/2100	2045/2100	2045/2100	2045/2100
	ZM	2100	2100	2100	2200	2200
Trolley up to 1800 mm high Rollwagen bis zu 1800 mm hoch xx/		1 x - GN 1/1	1x - GN 1/1 1x - GN 2/1 1x - 600x400	2x - GN 1/1 2x - GN 2/1 1x - 600x400	3x - GN 1/1 2x - GN 2/1 2x - 600x400	4x - GN 1/1 3x - GN 2/1 3x - 600x400
Power supply – Anschlusspannung [V-Hz] x/		400 V-3 – 50 Hz	400 V-3-50Hz	400 V-3 –50Hz	400 V-3 – 50 Hz	400 V-3 – 50 Hz
Power input – Leistungsaufnahme Nom/max [W] x/	ZC	5,1 / 7,9	5,1 / 7,9	7,9/11	7,9/11,0	13/15,3
	ZM	8,5/13,3	8,5/13,3	13/21,4	11/20	14,5/31,3

x/ general info only - this parameter may vary according to used condensing unit /CU/
xx/ informative / general examples


ZC 70A.05
ZM 70A.05

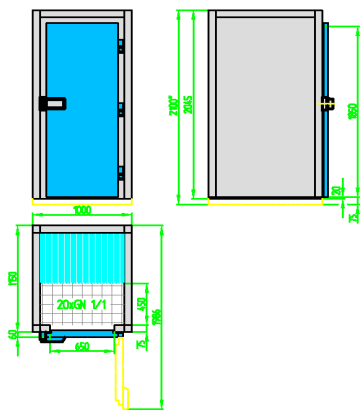


ZC 140A.05
ZM 140A.05

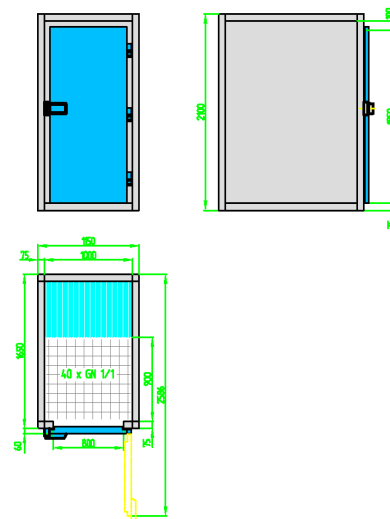

ZC 70.05
ZM 70.05

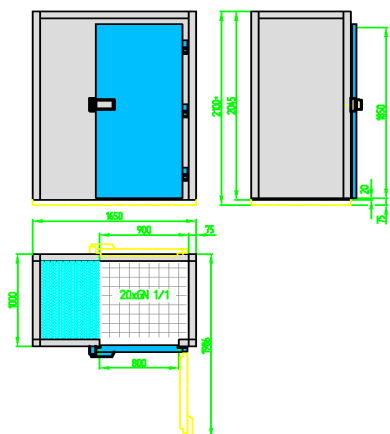

ZM 140.05

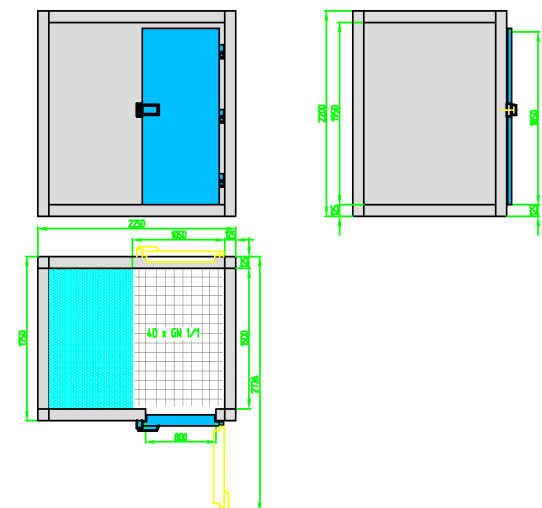

Company address:

☰ Mělnická 150, 277 06 Lužec nad Vltavou
Czech republic

<http://www.horak-bros.com>

Export department:

☎ +420 315 619 104

☎ +420 315 619 999

✉: export@horak-bros.com